




545
POTTERY



590
ASH



720
STONE

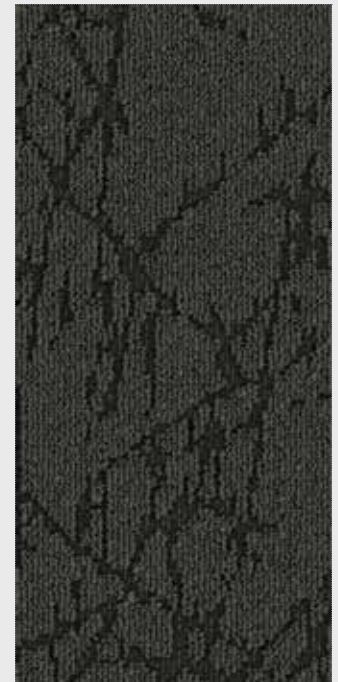

760
SHADOW



765
RUSTIC



770
TUNDRA



790
MONUMENT



875
LAKESIDE

Technical Specifications

| | |
|----------------------|---|
| Country of Origin | Australia |
| Description | Patterned Textured Loop Pile Carpet Tile |
| Colours | 8 Standard |
| Yarn | 100% Statron® Solution Dyed Nylon |
| Gauge | 47.2/10cm (1/12th Gauge) |
| Product Thickness | 7.0mm (+/- 1.0mm) |
| Pile Weight | 745g/m ² |
| Backing Structure | Enviro Bac® Minimum of 60% Recycled Content |
| Tile Size | 250mm x 1000mm Skinny Plank |
| Available Options† | 500mm x 500mm Tile Enviro Bac Plus® - Cushion Backed |
| Installation Method | Ashlar, Herringbone |
| Installation Options | Basket Weave, Half Basket Weave or Boxed In |

Performance

| | |
|--------------------------|---|
| Anti-static | AATCC 134 <3.5 Kilovolts at 21°C & 20% Relative Humidity |
| Flammability# | CRF 6.4kW/m ² (Direct Stick) Smoke Value 143% minutes |
| Colourfast to Light | 6-7 |
| Light Reflectance Values | Available on Request |
| Stain Resistance | Stain Warden® |
| Biocontaminant Control | Bioshield® Antimicrobial Control |
| ACCS Rating# | Contract Extra Heavy Duty & Stairs #17119 |
| Guarantee* | 15 Year |

Sustainability

| | |
|---------------------|---|
| PVC Minimisation | 100% PVC Free |
| Recycled Content | Minimum 60% Recycled Content in Backing Structure Minimum of 40% Recycled Content by Weight of Product |
| Indoor Air Quality# | Green Building Council compliant for VOC emission rate limits |
| Product Stewardship | This product is Recyclable and Qualifies for Takeback at the End of Life under the Godfrey Hirst Product Stewardship Program |
| Green Star | Environmental Certification Scheme (ECS) Level 4 Maximum Points - Certificate #17119 |
| Accreditation | Manufactured under a quality, environmental and health and safety system certified and complying with ISO9001, ISO14001 and AS4801 by an accredited certification body. |



#Test results and certificates are available on request. Specifications and colourations are subject to manufacturing tolerances. As part of Godfrey Hirst's continuous improvement program, Godfrey Hirst reserves the right to change the specifications of or delete colours of this product without notice.

All Godfrey Hirst carpet tiles must be installed in accordance with AS2455 (Parts 1 & 2) and the Godfrey Hirst Carpet Tile Installation Instructions. While all care is taken, product images may vary in colour due to possible printing process variations. Images do not seek to duplicate the exact visual appearance, but serve merely as a guide or point of reference.

†Minimum order quantities may apply. Contact your Godfrey Hirst Account Manager for information. *This guarantee is in addition to any rights consumers may have under Australian consumer laws. Terms and conditions apply – For full information in respect to the scope of the guarantee please contact your Godfrey Hirst Account Manager or our Head Office.