

ArmstrongFlooring

QUICK SHIP PERTH STOCK

Available from

Manag Distributors
(08) 6240 1000

28 Carbon Court Osborne Park, WA

Natural Creations® XL

5.0 x 230 x 1500mm Luxury Vinyl Plank 5.0 x 500 x 500mm Luxury Vinyl Tile

Natural Elements[®]

6.0 x 223 x 1492mm Luxury Hybrid Plank

2.0 x 228 x 1219mm Luxury Vinyl Plank

2.0 x 184 x 1219mm Luxury Vinyl Plank

2.0 x 114 x 1219mm Luxury Vinyl Plank



NATURAL CREATIONS® XL 5.0mm Luxury Vinyl Plank

Natural Creations XL from Armstrong Flooring offers you a Brand New range of twelve contemporary and traditional patterns in large format resilient vinyl flooring, including Australian Species: Spotted Gum, Blackbutt, and Tasmanian Oak. Available in 5.0mm thickness and as 230 x 1500mm long planks (500 x 500mm for Concrete tiles), Natural Creations XL combines underfoot comfort and timeless beauty with durability and acoustic properties. These beautiful Australian Species inspired looking floors are the perfect choice for your commercial or residential project with Armstrong durability and superior acoustic properties.

Features:



Acoustic benefits



Low maintenance



12 on-trend designs



Outstanding durability



100% Waterproof



Underfoot cushioning

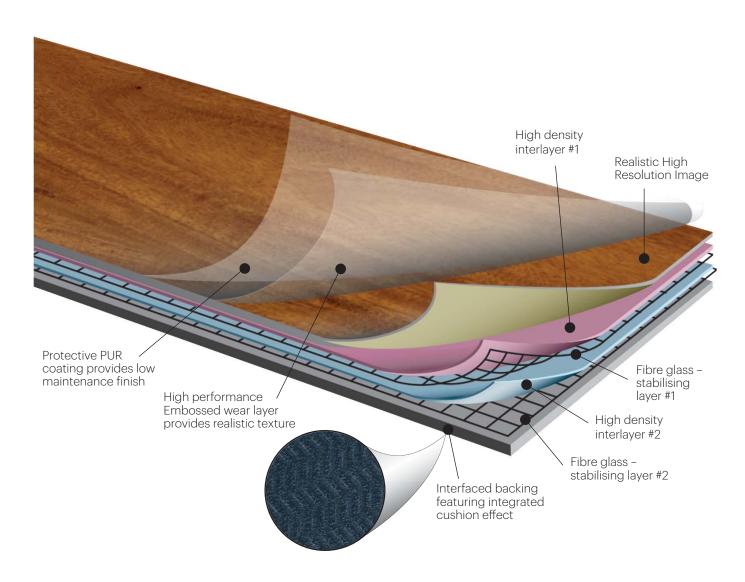


Diagram is indicative for demonstration purposes and is not to scale.



NATURAL CREATIONS® XL 5.0mm Luxury Vinyl Plank

5.0 x 230 x 1500mm







BLACKBUTT Emboss EC-C



OAK MOODY Emboss EC-C



RIVERLAND ASH Emboss EC-C

*Natural shade variation (light and dark) occurs between planks. **Note:** Patterns may feature colour variation (light to dark) to mimic the natural timber grain. Armstrong Flooring recommends mixing planks from several cartons to ensure that desired visual is achieved prior to the final installation process.



NATURAL CREATIONS® XL 5.0mm Luxury Vinyl Plank

5.0 x 230 x 1500mm



RIVERLAND LIMED Emboss EC-C



RIVERLAND SMOKE Emboss EC-C



SPOTTED GUM Emboss EC-C



TASMANIAN OAK Emboss EC-C



BARNYARD GREY Emboss EC-C



WILDWOOD GOLDEN Emboss EC-C

NATURAL CREATIONS® XL 5.0mm Luxury Vinyl Tile

5.0 x 500 x 500mm



POLISHED CONCRETE DARK GREY Emboss EC-L



POLISHED CONCRETE LIGHT GREY Emboss EC-L

2.0 x 114 x 1219mm

2.0 x 184 x 1219mm



LIMED OAK Emboss EC-C



MAHOGANY Emboss EC-H



BARNSIDE ASHEN Emboss EC-D *Emboss In Register




BURNETT BLACKBUTT Emboss EC-C

NATURAL ELEMENTS® 2.0mm LUXURY VINYL PLANK

Finding a floor that looks perfect in your home and stands up to your busy lifestyle is easy with Natural Elements* floors. You'll find beautiful wood looks on a tough resilient surface that can easily handle kids, pets, and heavy traffic. These floors are not only durable, they're also waterproof! Now you can have the beauty of natural wood almost anywhere – even in moisture-prone areas like bathrooms and laundry rooms.

Enhanced coatings on Natural Elements® flooring's top layer weathers daily wear and tear effortlessly, whether it's food and drink spills, bath splashes and muddy shoes or paws. These floors also easily resist scratches, stains, and wear, and cleaning couldn't be simpler. Just sweep, dust, or vacuum regularly, and occasionally damp mop to clean the surface.

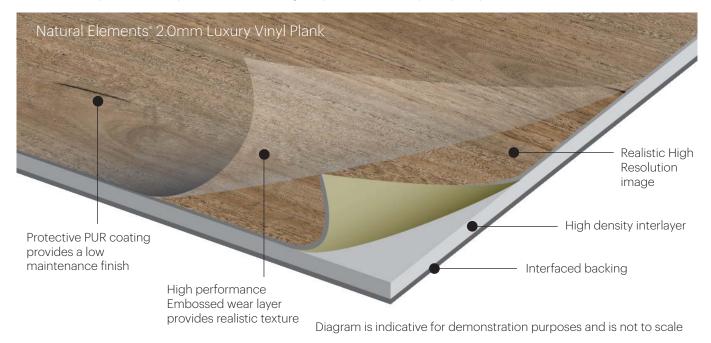

2.0 x 184 x 1219mm



COLONIAL OAK Emboss EC-C



HARVEST BUSHLAND Emboss EC-C



HOMESTEAD STRAW Emboss EC-F



OAK TASMANIAN Emboss EC-C



PADMA SANDS Emboss EC-T



PROVINCIAL OLD IVORY Emboss EC-C



ROUGHSAWN OAK Emboss EC-C



SUMMERLAND SPOTTED GUM Emboss EC-C

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

2.0 x 184 x 1219mm



TIGERWOOD BLONDE Emboss EC-B



BARNYARD GREY Emboss EC-F *Emboss In Register



PROVINCIAL BROWN
Emboss EC-F *Emboss In Register



WEATHERED GUM Emboss EC-C





RUSTIC OAK Emboss EC-C

^{*}Emboss in Register refers to the Embossing matching the pattern
Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

2.0 x 228 x 1219mm



ANTIQUE OAK SHADOW Emboss EC-C



ANTIQUE OAK TUMBLEWEED Emboss EC-C



FOSSIL CREEK EMBER Emboss EC-C



FOSSIL CREEK SAND Emboss EC-C







Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

NATURAL ELEMENTS® 6.0mm Luxury Hybrid Plank

6.0 x 223 x 1492mm



BURNETT BLACKBUTT Emboss EC-C



COLONIAL OAK Emboss EC-C



HABITAT TIMBERWOLF Emboss EC-C



HOMESTEAD STRAW Emboss EC-C

NATURAL ELEMENTS® 6.0mm Luxury Hybrid Plank

Our Luxury Hybrid Plank flooring is a great choice for people who want flooring that looks as realistic as possible while providing protection from the challenges that floors face daily.



Large Format



Low Maintenance



Micro-Bevelled Edge



Floating Floor



Outstanding Durability



100% Waterproof




Underfoot Cushioning



Acoustic Benefits



Kids and Pet Friendly

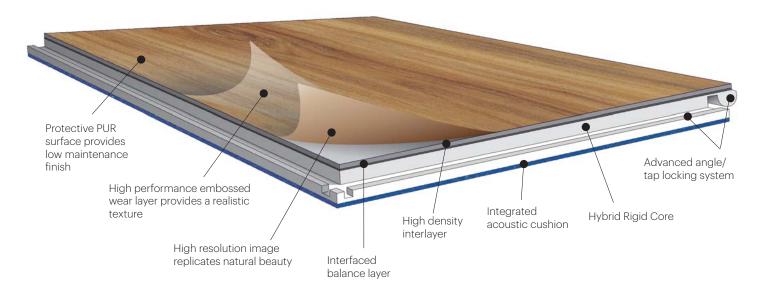

NATURAL ELEMENTS® 6.0mm Luxury Hybrid Plank

6.0 x 223 x 1492mm



OAK TASMANIAN Emboss EC-C



SUMMERLAND SPOTTED GUM Emboss EC-C



BARNYARD GREY Emboss EC-C



PROVINCIAL BROWN Emboss EC-C



ArmstrongFlooring*

TECHNICAL DATA	\	Natural Eleme			Elements Hy Luxury Hybri		Natural Creations XL 5.0mm Luxury Vinyl P	
Type of floor covering EN ISO 10582		Luxury Vinyl Plank			Luxury Hybrid Rigid Core		Luxury Vinyl Plank	
Manufactured		China			China		China	
Size ISO 24342		114, 184, 228 x 1219mm			223 x 1492mm		230 x 1500mm	
m²/carton		3.34, 3.37, 4.46			1.99		2.07	
Kg/m ² ISO 23997		3.45			9.75		8.8	
Overall Thickness	ISO 24346	2.0mm			6.0mm		5.0mm	
Wear Layer	ISO 24346	0.3mm			0.55mm		0.55mm	
Wear Layer Type	ISO 24340	Type I			Туре І		Type I	
Wear Resistance	EN660-2	Group T			Group T		Group T	
Polyurethane Reinforced		Yes PUR		<u> </u>	Yes PUR		Yes PUR	
Dimensional Stability	ISO 23999	≤ 0.25% (PASS)			≤ 0.25% (PASS)		≤ 0.25% (PASS)	
Residual Indentation	ISO 24343-1	≤ 0.1mm (PASS)		_	≤ 0.1mm (PASS)		≤ 0.1mm (PASS)	
Castor Chair	ISO 4918	PASS		PASS	, ,		PASS	
Acoustic Properties	ISO 717-2			, ,	L _{n,w} = 39dB (NCC:2019 Vol-1 FV5.1(b) PASS = Ln,w ≤ 62)		Ln,w ≤ 62 NCC:2016 Vol-1 FV5.1(b) PASS Ln,w = 43 dB (refer report XMIN2012011968CM)	
Fire Resistance	ISO 9239-1							<u> </u>
Critical Radiant Flux		≥ 8kW/m²		≥ 8kW/	≥ 8kW/m² (PASS)		≥ 8kW/m²	
Smoke Development Rate		< 750%		<750%.	<750%.min (PASS)		< 750%	
Squareness and EN ISO 24342 straightness		Deviation allowed at any point for side length						
≤ 400mm		≤ 0.25mm PAS	SS	≤ 0.25r	nm PASS		≤ 0.25mm PASS	
≥ 400mm		≤ 0.35mm PASS		≤ 0.35r	≤ 0.35mm PASS		≤ 0.35mm PASS	
Classification (Use Area) EN ISO 10874		Domestic Heavy: 23		Domes	Domestic Heavy: 23		Domestic Heavy: 23	
		Commercial Moderate: 31		Comm	ercial: 33		Commercial: 33	
		Woderate: 31		Industi	ial: 42		Industrial: 42	
Slip Resistance	AS 4586: 2013	3 (2004)						
Surface Embossing	EC-B	EC-C	EC-D	EC-F	EC-H	EC-L	EC-R	EC-T
Wet Pendulum	P3(X)	P3(X)	P3(X)	P3(X)	P3(X)	P3(X)) P2(Y)	P2(Y)
Oil – Wet	R9	R10	R10	R10	R10	R10	R10	R9

NOTE: Surface Embossing – each different surface emboss/texture is tested separately for slip resistance characteristics, refer to third party certificates for details.

Available from:



WA: 08 6240 1000 Email: Sales@manag.com.au