

Inspiring
Great
Spaces™

Armstrong®
FLOORING
COMMERCIAL


NATURAL CREATIONS® XL
5.0 x 230 x 1500mm
COMMERCIAL FLOORING
LUXURY VINYL PLANK

NATURAL CREATIONS™ XL 5.0mm LUXURY VINYL PLANK

Whether at work or at home, there's no need to sacrifice style or function. Natural Creations XL from Armstrong Flooring offers you a range of 14 contemporary and traditional patterns in large format resilient vinyl flooring. Available 5.0mm thick and as 230 x 1500mm long planks, Natural Creations XL combines underfoot comfort and timeless beauty with durability and acoustic properties. These beautiful floors are the perfect choice for any commercial or residential project



VALLEY OAK – HAZE
3X109508

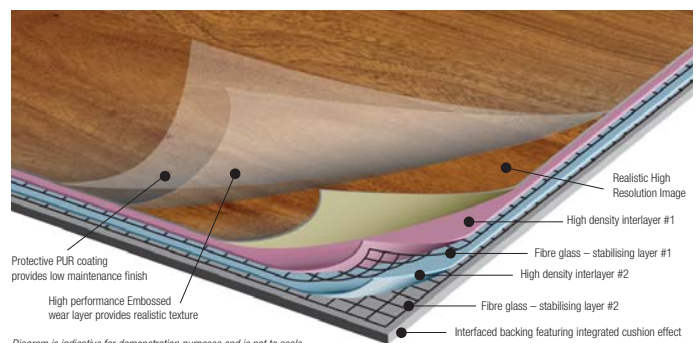

NATURAL CREATIONS XL 5.0mm PLANK

NATURAL CREATIONS® XL 5.0mm LUXURY VINYL PLANK

5.0 x 230 x 1500mm



OAK – TRANQUIL
3X057014



OAK – HARMONY
3X057015



OAK – MOODY
3M057009



OAK – DEBONAIR
3M116406

Special Order available as 2.5mm. Minimum Order Quantities apply. Please contact your Sales Representative for more information.

NATURAL CREATIONS® XL 5.0mm LUXURY VINYL PLANK

5.0 x 230 x 1500mm



VALLEY OAK – HAZE
3X109508



RIVERLAND – SMOKE
3X111906



VALLEY OAK – MIST
3X109505



RIVERLAND – LIMED
3X111907



RIVERLAND – NATURAL
3X111802

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

NATURAL CREATIONS® XL 5.0mm LUXURY VINYL PLANK

5.0 x 230 x 1500mm



WILDWOOD – TAWNY
3X058007



WILDWOOD – GOLDEN
3X172211






IRONBARK – RUSTIC
3X105207



BARNWOOD – OMBRE
3X102605

Special Order available as 2.5mm. Minimum Order Quantities apply. Please contact your Sales Representative for more information.

TECHNICAL DATA

| | | Natural Creations XL 5.0mm Luxury Vinyl Plank |
|-----------------------------|----------------------|--|
| Type of floor covering | EN ISO 10582 | Luxury Vinyl Plank |
| Manufactured | | China |
| Overall Thickness | ISO 24346 | 5.0mm |
| Wear Layer | ISO 24346 | 0.55mm |
| Size | ISO 24342 | 230 x 1500mm |
| m ² /carton | | 2.07 |
| Kg/m ² | ISO 23997 | 8.8 |
| Wear Layer Type | ISO 24340 | Type I |
| Wear Resistance | EN660-2 | Group T |
| Polyurethane Reinforced | | Yes PUR |
| Squareness and straightness | EN ISO 24342 | Deviation allowed at any point for side length |
| ≤ 400mm | | ≤ 0.25mm PASS |
| > 400mm | | ≤ 0.35mm PASS |
| Dimensional Stability | ISO 23999 | ≤ 0.25% (PASS) |
| Residual Indentation | ISO 24343-1 | ≤ 0.1mm (PASS) |
| Castor Chair | ISO 4918 | PASS |
| Acoustic Properties | ISO 717-2 | L _{n,w} (Cl) ≤ 62 NCC:2016 Vol-1 FV5.1(b) PASS L _{n,w} + Cl= 59 (refer report 160826004SHF-BP-1R1) |
| Fire Resistance | ISO 9239-1 | |
| Critical Radiant Flux | | ≥ 8kW/m ² |
| Smoke Development Rate | | < 750% |
| Classification (Use Area) | EN ISO 10874 | Domestic Heavy: 23  Commercial Heavy: 33  Industrial General: 42  |
| Slip Resistance | AS 4586: 2013 (2004) | |
| Surface Embossing | | EC-C |
| Wet Pendulum | | P3(X) |
| Oil – Wet | | R10 |

NOTE: Surface Embossing – each different surface emboss/texture is tested separately for slip resistance characteristics, refer to third party certificates for details.

Contact:

Armstrong Flooring Pty Ltd
29 – 39 Mills Road, Braeside, 3195 Victoria Australia

For further information and samples:
Australia Freecall 1800 632 624
Email customer_services@armstrongflooring.com or
visit us on the web

www.armstrongflooring.com.au

M3079 August 2017