


ingrain



545
POTTERY



590
ASH

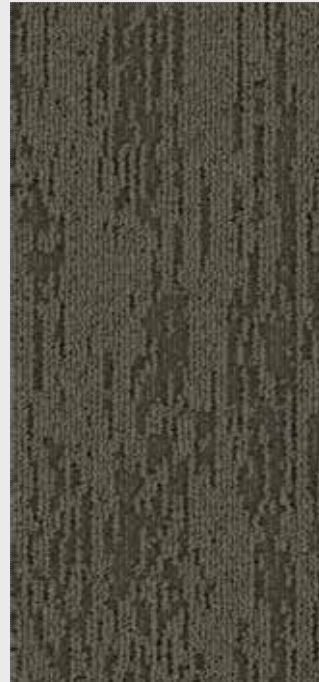

720
STONE



760
SHADOW



765
RUSTIC



770
TUNDRA



790
MONUMENT



875
LAKESIDE

Technical Specifications

Country of Origin	Australia
Description	Patterned Textured Loop Pile Carpet Tile
Colours	8 Standard
Yarn	100% Statron® Solution Dyed Nylon
Gauge	47.2/10cm (1/12th Gauge)
Product Thickness	7.0mm (+/- 1.0mm)
Pile Weight	745g/m ²
Backing Structure	Enviro Bac® Minimum of 60% Recycled Content
Tile Size	250mm x 1000mm Skinny Plank
Available Options†	500mm x 500mm Tile Enviro Bac Plus® - Cushion Backed
Installation Method	Ashlar, Herringbone
Installation Options	Basket Weave, Half Basket Weave or Boxed In

Performance

Anti-static	AATCC 134 <3.5 Kilovolts at 21°C & 20% Relative Humidity
Flammability#	CRF 6.4kW/m ² (Direct Stick) Smoke Value 143% minutes
Colourfast to Light	6-7
Light Reflectance Values	Available on Request
Stain Resistance	Stain Warden®
Biocontaminant Control	Bioshield® Antimicrobial Control
ACCS Rating#	Contract Extra Heavy Duty & Stairs #17119
Guarantee*	15 Year

Sustainability

PVC Minimisation	100% PVC Free
Recycled Content	Minimum 60% Recycled Content in Backing Structure Minimum of 40% Recycled Content by Weight of Product
Indoor Air Quality#	Green Building Council compliant for VOC emission rate limits
Product Stewardship	This product is Recyclable and Qualifies for Takeback at the End of Life under the Godfrey Hirst Product Stewardship Program
Green Star	Environmental Certification Scheme (ECS) Level 4 Maximum Points - Certificate #17119
Accreditation	Manufactured under a quality, environmental and health and safety system certified and complying with ISO9001, ISO14001 and AS4801 by an accredited certification body.



#Test results and certificates are available on request. Specifications and colourations are subject to manufacturing tolerances. As part of Godfrey Hirst's continuous improvement program, Godfrey Hirst reserves the right to change the specifications of or delete colours of this product without notice.

All Godfrey Hirst carpet tiles must be installed in accordance with AS2455 (Parts 1 & 2) and the Godfrey Hirst Carpet Tile Installation Instructions. While all care is taken, product images may vary in colour due to possible printing process variations. Images do not seek to duplicate the exact visual appearance, but serve merely as a guide or point of reference.

†Minimum order quantities may apply. Contact your Godfrey Hirst Account Manager for information. *This guarantee is in addition to any rights consumers may have under Australian consumer laws. Terms and conditions apply – For full information in respect to the scope of the guarantee please contact your Godfrey Hirst Account Manager or our Head Office.