



Kenbrock

Z E N I T H




Aesthetic, Acoustic, Achievable


- > The zenith of modern LVT flooring.
- > Stylish colours, patterns and grains faithfully reproduced from exotic local and international timbers.
- > Convenient modular 'drop down' installation advantage*.
- > 5.0mm plank thickness for superior underfoot comfort and enhanced acoustic properties.
- > 0.3mm PU wear layer and Dura Coat surface protection for easy maintenance.
- > A highly stable fibreglass core layer.
- > Contains anti-bacterial and anti-fungal technology.
- > Environmentally friendly, with green tag certification.
- > Phthalate Free. Contains no harmful fillers nor harmful plasticisers.

*after applying pressure sensitive adhesive to the subfloor.


Z E N I T H

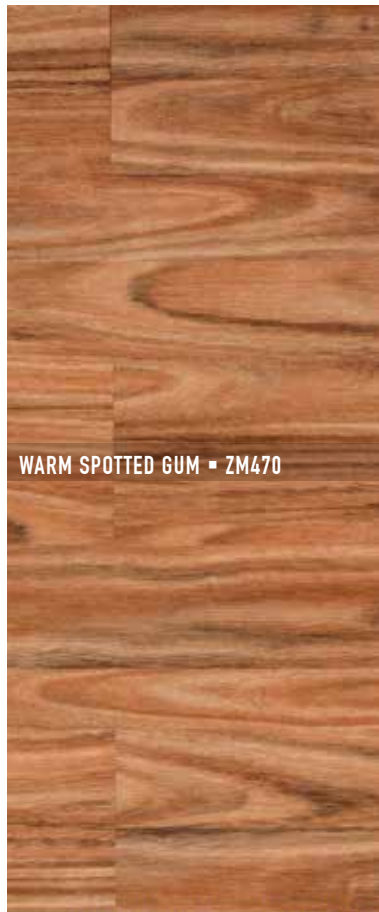


WARM SPOTTED GUM ▪ ZM470

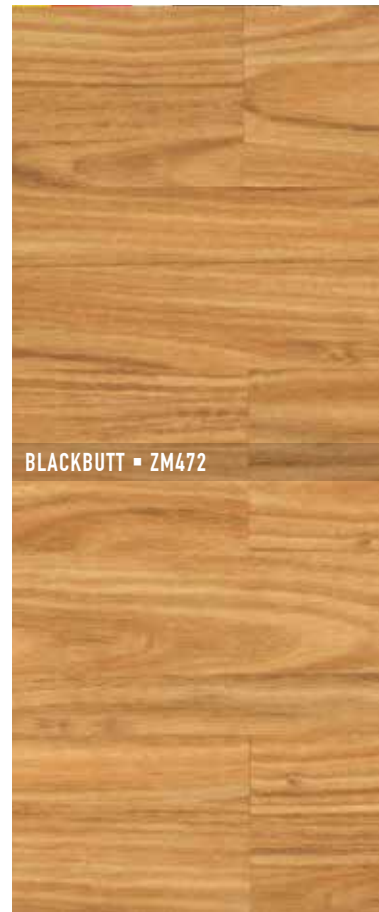


BLACKBUTT ▪ ZM472

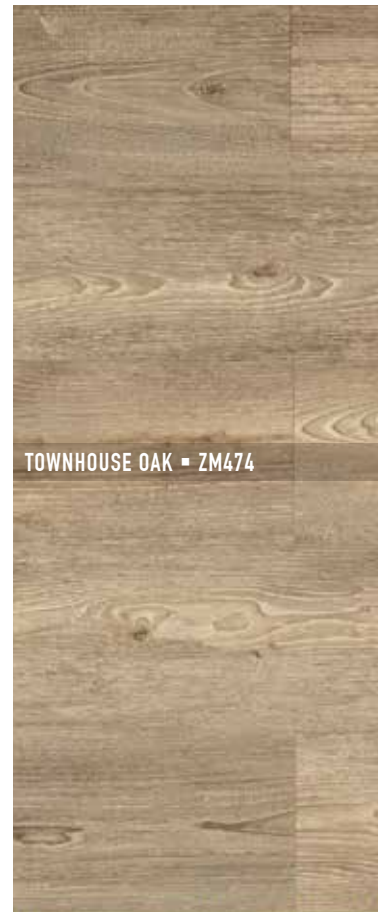


TOWNHOUSE OAK ▪ ZM474

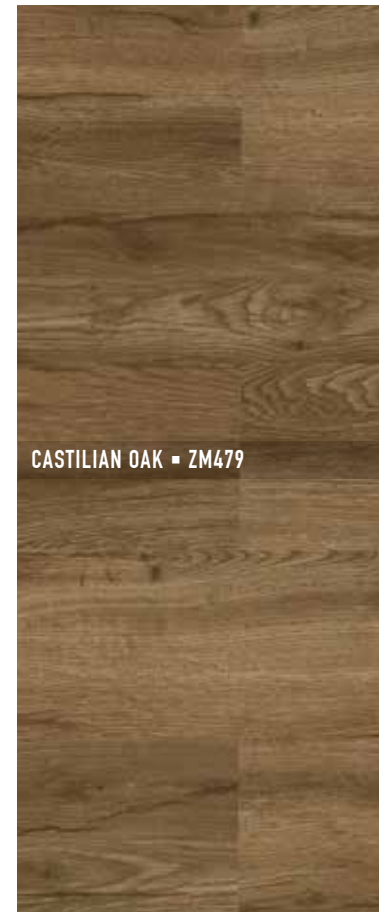

CASTILIAN OAK ▪ ZM479

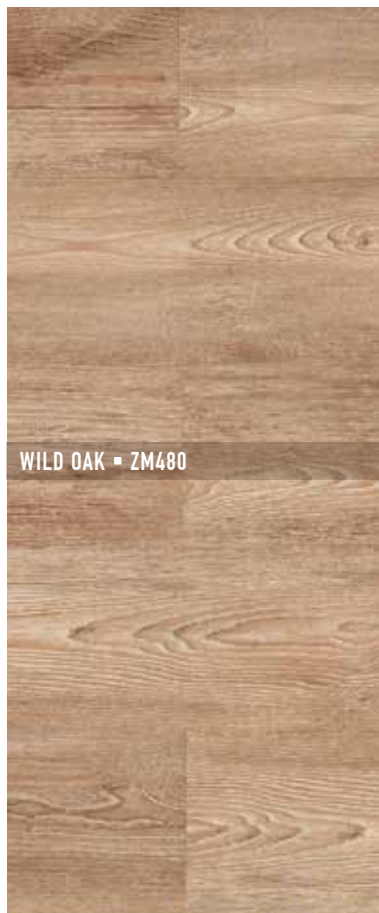

WILD OAK ▪ ZM480

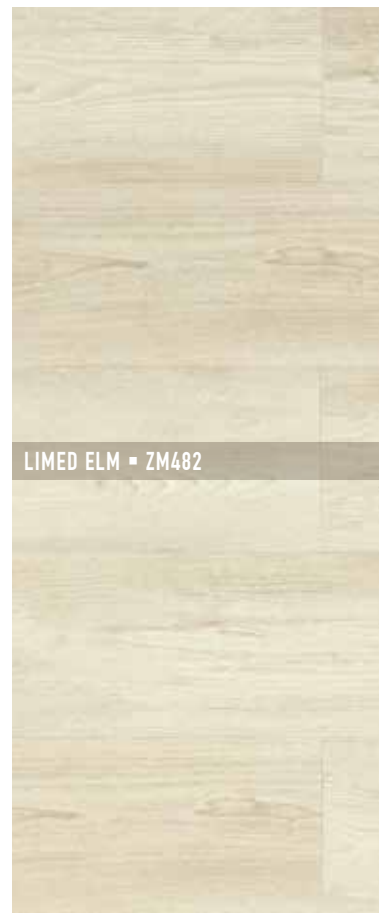


LIMED ELM ▪ ZM482



MIDNIGHT OAK ▪ ZM484



VINEYARD OAK ▪ ZM485

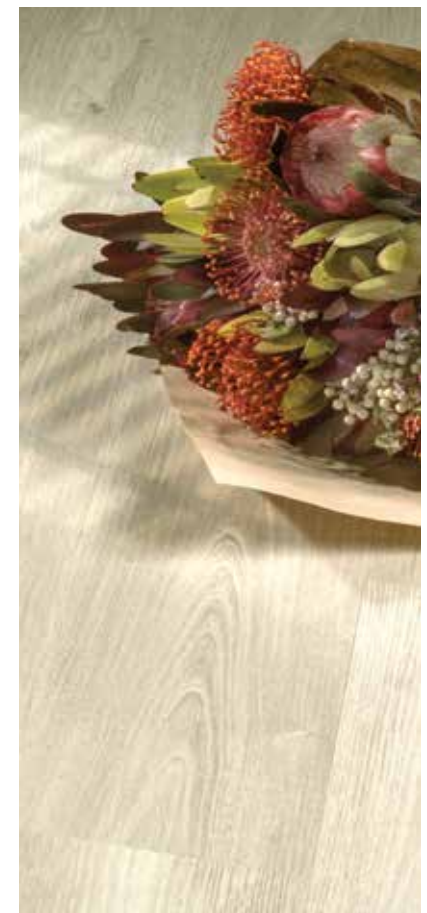



CASTILIAN OAK - ZM479



LIMED ELM - ZM482

ZENITH

PRODUCT SPECIFICATIONS

Usage



Heavy
Domestic



Light
Commercial

Thickness	5.0mm
Wear Layer	0.30mm
Size	177.8mm x 1219.2mm
Qty per carton	10 planks
M ² per carton	2.17m ²

Distributed by Kenbrock Pty Ltd

See www.kenbrock.com.au for installation, maintenance and warranty details.

Zenith is manufactured in an ISO9001 and ISO14001 certified facility.



Kenbrock

Victoria (03) 9765 2222
New South Wales/ACT 1300 785 000
Queensland (07) 3881 1000
South Australia 1800 674 145
Western Australia/NT 1800 674 145
Tasmania 1800 674 145

www.kenbrock.com.au



DuraCoat
PUR



green building council australia
MEMBER